

Our Most Versatile Lift!

Custom Industrial Products' S Series Vertical Material Lift is a straddle (2 post) design and is popular because of its variety of applications. It is perfect for any mezzanine, balcony or multi-story application where safe material handling is required.

The platform carriage of the S-Series lift is available in many different sizes and it can easily handle small, medium, or large material loads. The platform carriage design allows for loading and unloading from the same side (C-Configuration) or from front to rear (Z-Configuration).

Standard Features

- Load Capacity: up to 6,000 lbs
- Platform Size: up to 8'W x 8'D
- Operating Levels: up to 4-Stops
- Travel Height: up to 40'
- Operating Speed: 20-25 fpm
- Power: 230V 3P
- Illuminated Controls at Each Level
- All-Mechanical, Dual Cable Lifting System
- Cable Safety Brakes
- Slack Cable Switches
- Double Swing Gates at Each Level
- Mount: Surface or Pit

Options

- Operating Speed Increase
- Alternate Power of: 460V 3P
- Soft/Start-Soft Stop Operation
- Ground Level Loading Ramp
- Security Enclosures
- Multi-Level Operation
- Outside Applications
- Split Guide Rails & Knock-Down Platform Carriage

OTHER MODELS AVAILABLE!



S Series Vertical Material Lift

Vertical Reciprocating Conveyor



shown with optional security enclosures.

Toll Free: 800-699-2212

Phone: 321-728-3355 Fax: 321-728-3352

E-Mail: sales@customindprod.com

www.customindprod.com

7862 Ellis Road, Melbourne, FL 32904, USA

► S Series (S)

Technical Specifications

Please fill out your specifications in the spaces provided. Afterwards, contact us for additional information and for special requirements or configurations.

1. What **WEIGHT CAPACITY** do you require?
(1,000 - 6,000 lbs.) _____
2. What is the **HEIGHT** in inches from the ground level floor surface to the second level floor surface? (up to 40') _____
3. What **PLATFORM CARRIAGE SIZE** do you require?
(up to 8'W x 8'D) _____
4. What **PLATFORM LOAD HEIGHT** do you require?
(72" h standard; 78" h maximum through doors)
5. Which **LOAD CONFIGURATION** do you require?
(C or Z) _____
6. Will the unit be **PIT** or **SURFACE** mounted? _____
7. If you choose a surface mounted unit, do you require an optional **LOADING RAMP**? _____


Surface Mount:

The loading height is 6" from the floor on the ground level and flush with the floor on upper levels.


Pit Mount:

Loading Height is flush with the floor on all levels (the standard 2-Post pit is 6"-8").

Load / Unload Configurations



General Dimensions

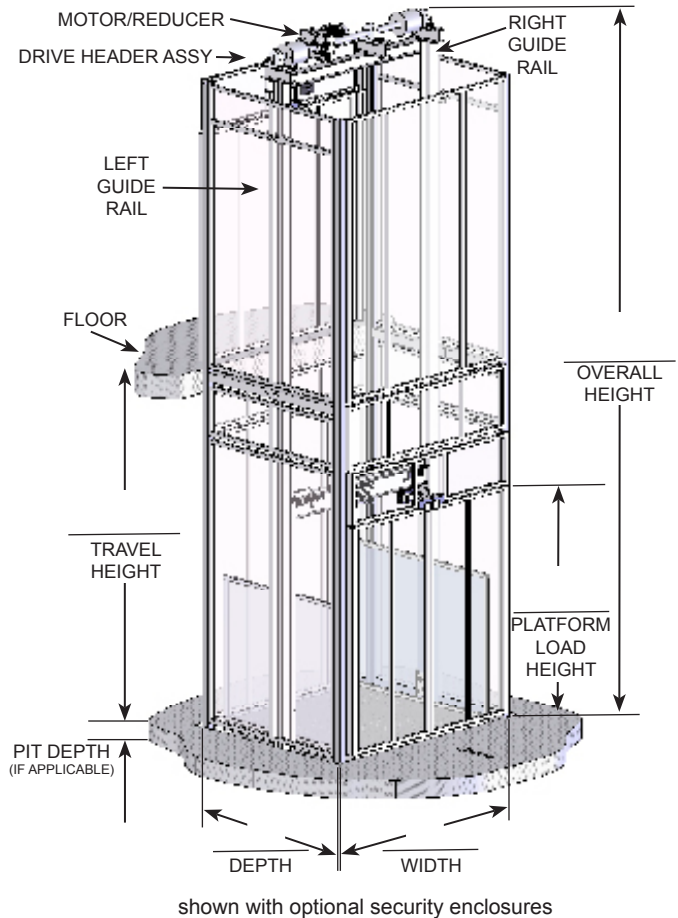

Optional Security Enclosures

Shown On A Two-Stop, Z Configuration Unit

